



LEVEL.IT  
Adjustable Pedestals

## SIMPLE INGENUITY

March 2026

### LEVEL.IT ADJUSTABLE PEDESTALS

- Simple, extended height range pedestal
- Patented design - features exclusive internal coupler
- Each center-loaded pedestal supports 1000 pounds
- Pedestal bracing system for additional stability
- Fast and easy installation - promotes labor savings
- Screw-to-adjust pedestals ensure perfectly level decks
- Impervious to water, mold, and freeze/thaw cycles
- Made in the U.S.A.




©2013-2026 United Construction Products, Inc. All Rights Reserved.  
Covered by one or more patents or pending patents.

# SPECIFICATIONS

- Supports 1000 lbs (454 kg) FoS:3 per pedestal
- Select 1/8 or 3/16 inch (3.2 or 4.5 mm) tab size for pedestals
- Level.It adjustable system height range is 2 to 24 inches (51 to 610 mm)
- Accessories available for heights from 1/8 to 2 inches (3.2 to 51 mm)
- Pedestals made of high density copolymer polypropylene
- Contains 20% post-industrial recycled material

	Model No.	Description	Height Range	Notes
Pedestals	 LC	Adjustable Pedestal	2" to 4-3/4" (51 to 121 mm)	--
	 C1	Coupler	Adds up to 1-1/2" (38 mm)	--
	 C4	Coupler	Adds up to 4" (102 mm)	--
Tabs	 LT18 LT316	Spacer Tab	--	Select 1/8" (3.2 mm) or 3/16" (4.5 mm) Tab Width
	 VT18 VT316	Ultra Low Height Pedestal	1/8" (3.2 mm)	--
	 HD25-18 HD25-316 HD50-18 HD50-316 HD75-18 HD75-316	Fixed Height Stackable Pedestal	1/4" (6 mm) 1/2" (13 mm) 3/4" (19 mm)	Stack up to 4 Supports 1250 lbs (567 kg) FoS:3 per Pedestal
	 LO	Low Height Adjustable Pedestal	1-1/4" to 2" (32 to 51 mm)	--
	 B11	Flexible Shim	1/16" (1.5 mm)	--
	 PS1	Rigid Shim	1/8" (3.2 mm)	--
	 LD4	Base Leveler	Adds 1/4" (6 mm)	Stack up to 4 total to base of Pedestals For 1/4" per foot (2%) slope compensation each
Accessories	 FS-1	Wood Tile Fastening Kit	Fastens Wood Tiles to Adjustable Pedestals with long screw, and HD50 or HD75 Fixed Height Pedestals with short screw	
	 FS-12 FS-12-WT	12" Fastening Spline 3/16" (4.5 mm) Tab	Fastens Wood Tiles or Paver Trays to Adjustable Pedestals with long screw, and HD50 or HD75 Fixed Height Pedestals with short screw	
	 JT	Joist Top Attachment	Adds 3/16" (4.5 mm)	Works with 2 x and 4 x lumber on Adjustable Pedestals
	 JS	Joist Saddle Attachment	Adds 1/2" (13 mm)	Works with 2 x and 4 x lumber alone or on any Bison Pedestal
	 FIB	Floating Insulation Base	12" x 12" x 11/16" (305 x 305 x 17 mm) For use over roofing systems with 20 to 40 psi insulation	
	 FFB	Floating Foundation Base	12" x 12" x 1/4" (305 x 305 x 6 mm) For use over soil	

IMPORTANT: Refer to Level.It product specifications to ensure proper use and installation. For more information visit [www.bisonip.com](http://www.bisonip.com).

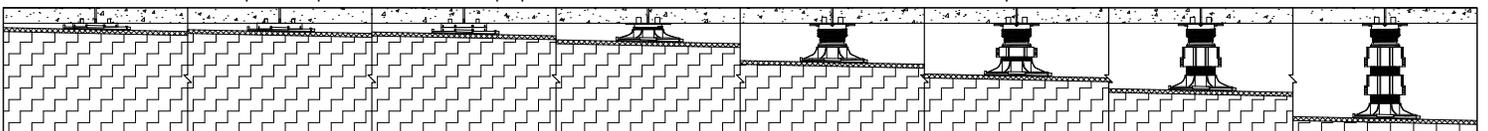

## FIXED HEIGHT PEDESTALS

HD50 (1/2") HD75 (3/4") 2 HD50 (1")

## ADJUSTABLE PEDESTALS

LO (1-1/4" to 2") LC (2" to 4-3/4") LC + C1 (4-3/4" to 6-1/4") LC + C4 (6-1/4" to 8-3/4") LC + 2 C4 (8-3/4" to 12")

NOTE: Pedestals each shown with one optional LD4 slope compensation accessory.